

# 1 Gang Wall Mount Dimmer

Written by Carl Holden

Thursday, 22 December 2011 13:54 - Last Updated Thursday, 05 January 2012 13:34

---

## 1 gang wall mount dimmer



A PLLC 1 Gang 250 Watt 50 Hz Wall Mount dimmer, showing the top face plate removed exposing the Electronic circuitry immediately behind the 1 Gang push button, as well as the REAR of the Assemble.

2 Wires are required – Active (Red) – Neutral (Black) – Load (White)

Prior to placing in Setup Mode, it is recommended to always “Default” the unit.

1. Remove the Front Faceplate
2. Press the UP Button 5 times....LED begins to flash...UP button can be found on Electronic board
3. Press the down button 10 times... DOWN button can be found on Electronic board
4. Then Press the UP button 2 times...LED stops flashing....the Unit has now be defaulted
5. Repeat Steps 1 & 2, to now place the defaulted unit in Setup Mode...Press UP button 5 times, to put device into Setup Mode
6. By using the UPSTART Software, downloaded from the PLLC Web site, you can now discover your UPB device and place or create your NEW Network


## 1 Gang Wall Mount Dimmer

Written by Carl Holden

Thursday, 22 December 2011 13:54 - Last Updated Thursday, 05 January 2012 13:34

---

The software used to configure and program the UPB system is called "UPSTART".

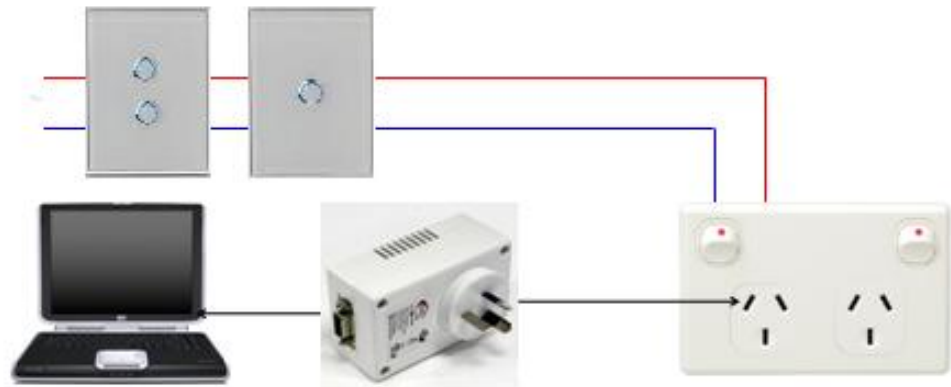

Example below we see a single 250W Master dimmer switch controlling a single lighting circuit in a bedroom.

